

#### **Product Datasheet**

# 60W/48V Industrial DIN Rail Power Supply

(GWS-P3000-DP60-48)



#### **OVERVIEW**

GWS-P3000-DP60-48 is an economical 60W DIN rail power supply that conforms to German industrial standards. It is suitable for installation on TS-35/7.5, or TS-35/15 rails, using 90VAC to 264VAC input, and complies with EN61000-3-2 Standard on Harmonic Current Specifications Specified by the European Union.

GWS-P3000-DP60-48 adopts a metal shell design to improve heat dissipation consumption. The working efficiency is as high as 89%, and the product can work in an ambient temperature of -40 degrees to 70 degrees under the condition of air circulation. It has a constant current mode overload protection function, suitable for a variety of inductive or capacitive load applications, complete protection functions, and compliance with relevant certifications for industrial control equipment, making it a very competitive power supply solution for industrial applications.



## **FEATURE**

Meet EMC Standard

• 100% full load aging test

• Power Input: AC90-264V

• Wide operation temperature range: -40°C-70°C

• High efficiency, long life time and high reliability

• Support production for short circuit/over current/over voltage

## **APPLICATION**

- Industrial Control System
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

#### **TECHNICAL SPECIFICATION**

Model	GWS-P3000-DP60-48
Output	
Group of Output	1
DC Voltage	48VDC
Output Voltage Factory	48.00-48.2VDC (Vin: 220Vac / Load: 0A)
Setting	
Output Rated Current	1.25A
Output Current Range	0-1.25A
Rated Output Power	60W
Total Peak Output Power	90W (sustainable time 10S/220VAC)
Peak Output Current	1.5A (sustainable time 10S/220VAC)



Ripple Noise  Peak-to-peak value ≤100mV. (Measurement method: The terminal should be connected in parallel with 0.1uF and 47uF capacitors, and the measurement should be performed at a bandwidth of 20MHz)  Output Voltage Range  47-56VDC  Stabilized Voltage Precision  Line Regulation  ± 1% (48.48VDC-47.52VDC)  Line Regulation  ± 1% (48.48V-47.52V), (@ 85-264VAC input, 100% load)  Load Regulation  ± 1% (48.48V-47.52V), (@ 85-264VAC input, 0-100% load)  Output Start Time  <1.5S @ nominal input (100% load)  Output Hold Time  ≥ 20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot  ≤5.0%  Input  Input Voltage Range  90-264VAC  Input Rated Voltage  Range  Frequency Range  47Hz-63Hz  Starting Voltage  90VAC  Efficiency  ≥85.0% @115VAC, >89.0% @ 230VAC  Input Current  <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  ≥ 20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery		
measurement should be performed at a bandwidth of 20MHz)  Output Voltage Range  47-56VDC  Stabilized Voltage Precision  Line Regulation  ±0.5%(48.24VDC-47.52VDC)  Line Regulation  ±1% (48.48V-47.52V), (@ 85-264VAC input, 100% load)  Load Regulation  ±1% (48.48V-47.52V), (@ 85-264Vac input, 0-100% load)  Output Start Time  <1.5\$ @ nominal input (100% load)  Output Hold Time  >20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot  Input  Input Voltage Range  90-264VAC  Input Rated Voltage Range  Frequency Range  47Hz-63Hz  Rated Frequency  50Hz/60Hz  Starting Voltage  90VAC  Efficiency  >85.0% @115VAC, >89.0% @ 230VAC  Input Current  <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  <20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Ripple Noise	Peak-to-peak value ≤100mV. (Measurement method: The terminal should
Output Voltage Range Stabilized Voltage Precision Line Regulation Line Regulat		be connected in parallel with 0.1uF and 47uF capacitors, and the
Stabilized Voltage Precision  Line Regulation  ±0.5%(48.24VDC-47.52VDC), (@ 85-264VAC input, 100% load)  Load Regulation  ±1% (48.48V-47.52V), (@ 85-264Vac input, 0-100% load)  Output Start Time  <1.5S @ nominal input (100% load)  Output Hold Time  >20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot  Input  Input Voltage Range  90-264VAC  Input Rated Voltage Range  Frequency Range  47Hz-63Hz  Rated Frequency  50Hz/60Hz  Starting Voltage  90VAC  Efficiency  >85.0% @115VAC, >89.0% @ 230VAC  Input Current  <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  <20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery		measurement should be performed at a bandwidth of 20MHz)
#1% (48.48VDC-47.52VDC)  Line Regulation	Output Voltage Range	47-56VDC
Precision  Line Regulation  ± 0.5%(48.24VDC-47.76VDC), (@ 85-264VAC input, 100% load)  Load Regulation  ± 1% (48.48V-47.52V), (@ 85-264Vac input, 0-100% load)  Output Start Time  < 1.5S @ nominal input (100% load)  Output Hold Time  > 20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot  ≤ 5.0%  Input  Input Voltage Range  100-240VAC  Range  Frequency Range  47Hz-63Hz  Rated Frequency  50Hz/60Hz  Starting Voltage  90VAC  Efficiency  > 85.0% @115VAC, >89.0% @ 230VAC  Input Current  < 1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  < 20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Stabilized Voltage	+10/ (40 40)/DC 47 50)/DC)
Load Regulation ±1% (48.48V-47.52V), (@ 85-264Vac input, 0-100% load)  Output Start Time <1.5S @ nominal input (100% load)  Output Hold Time >20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot ≤5.0%  Input  Input Voltage Range 90-264VAC  Input Rated Voltage 100-240VAC  Range  Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery	Precision	±1% (48.48 VDC-47.32 VDC)
Output Start Time <1.5S @ nominal input (100% load)  Output Hold Time >20ms @ 115VAC, >1250ms @ 230VAC (100% load)  Voltage Overshoot ≤5.0%  Input  Input Voltage Range 90-264VAC  Input Rated Voltage 100-240VAC  Range Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection mode: Swing machine, Self-recovery	Line Regulation	±0.5%(48.24VDC-47.76VDC), (@ 85-264VAC input, 100% load)
Output Hold Time >20ms @ 115VAC, >1250ms @ 230VAC (100% load )  Voltage Overshoot ≤5.0%  Input  Input Voltage Range 90-264VAC  Input Rated Voltage 100-240VAC  Range  Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Load Regulation	$\pm 1\%$ (48.48V-47.52V), (@ 85-264Vac input, 0-100% load)
Voltage Overshoot ≤5.0%  Input  Input  Input Voltage Range 90-264VAC  Input Rated Voltage 100-240VAC  Range  Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Output Start Time	<1.5S @ nominal input (100% load )
Input Voltage Range 90-264VAC  Input Rated Voltage 100-240VAC  Range 100-240VAC  Range 47Hz-63Hz  Rated Frequency Range 47Hz-63Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Output Hold Time	>20ms @ 115VAC, >1250ms @ 230VAC (100% load )
Input Voltage Range  90-264VAC  Input Rated Voltage Range  Frequency Range  47Hz-63Hz  Rated Frequency  50Hz/60Hz  Starting Voltage  90VAC  Efficiency  >85.0% @115VAC, >89.0% @ 230VAC  Input Current  <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  <20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Voltage Overshoot	≤5.0%
Input Rated Voltage Range  Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection mode: Swing machine, Self-recovery	Input	
Range  Frequency Range  47Hz-63Hz  Rated Frequency  50Hz/60Hz  Starting Voltage  90VAC  Efficiency  >85.0% @115VAC, >89.0% @ 230VAC  Input Current  <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current  <20A @ 115VAC, <35A@230VAC  Power Factor  PF>0.6 (at full load)  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection mode: Swing machine, Self-recovery	Input Voltage Range	90-264VAC
Frequency Range 47Hz-63Hz  Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Input Rated Voltage	100-240VAC
Rated Frequency 50Hz/60Hz  Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Range	
Starting Voltage 90VAC  Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery	Frequency Range	47Hz-63Hz
Efficiency >85.0% @115VAC, >89.0% @ 230VAC  Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery	Rated Frequency	50Hz/60Hz
Input Current <1.40A @115VAC, <0.80A @ 230VAC  Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Starting Voltage	90VAC
Start Inrush Current <20A @ 115VAC, <35A@230VAC  Power Factor PF>0.6 (at full load)  Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Efficiency	>85.0% @115VAC, >89.0% @ 230VAC
Protection  Protection  Output Over Power  78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Input Current	<1.40A @115VAC, <0.80A @ 230VAC
Protection  Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Start Inrush Current	<20A @ 115VAC, <35A@230VAC
Output Over Power 78-97W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode: Swing machine, Self-recovery	Power Factor	PF>0.6 (at full load)
enabling the protection. Protection mode: Swing machine, Self-recovery	Protection	
	Output Over Power	78-97W Swing machine (Testing method: Increase the output current until
often over novem released)		enabling the protection. Protection mode: Swing machine, Self-recovery
after over-power released.)		after over-power released.)
Output Over Voltage 57-70V Swing machine (Short circuit the Pin1-2 of U8, swing machine.	Output Over Voltage	57-70V Swing machine (Short circuit the Pin1-2 of U8, swing machine.
Output recovery to normal after removing the short circuit) Note: Do not		Output recovery to normal after removing the short circuit) Note: Do not




	use external voltage.	
Output Over Current	1.5-1.875A Swing machine (Testing method: Increase the output current	
	until enabling the protection. Protection mode: Swing machine,	
	Self-recovery after over-current released.)	
Output Short Circuit	Use a copper wire with a sufficient cross-sectional area and a length of	
	15cm±5cm to directly short-circuit at the power output port, which can be	
	short-circuited for a long time, and can be automatically restored after the	
	short-circuit is eliminated.	
<b>Operation Environment</b>		
Operation TEMP /	-40°C-70°C, 20%-95%RH No condensing	
Humidity		
Storage TEMP /	-40°C-85°C, 10%-95%RH No condensing	
Humidity		
Temperature Coefficient	±0.03%/°C (0-50°C)	
Vibration	Frequency range 10-500Hz, acceleration 2G, each sweep cycle 10min. 6	
vioration	sweep cycles along the X, Y, and Z axes	
Impact	Acceleration 20G, duration 11ms, 3 shocks along X, Y, and Z axis each	
Altitude	2000m	
Safety and Electromagnetic Compatibility Standard		
Security Standard	GB4943/EN62368-1 ■Reference □Certification	
Dielectric Strength	Input—Output: 3KVAC/10mA, InputCase:1.5KVAC/10mA	
	OutputCase: 0.5KVDC/10mA, Time for each testing is 1min.	
Ground Test	Test conditions: 32A/2 minutes, Ground impedance: <0.1 ohms.	
leakage Current	Input to ground ≤3.5mA, Input to output ≤0.25mA (Input 264VAC,	
	Frequency 63Hz)	
Insulation Resistance	Input-Output: 10M ohms	
Conducted Disturbance	EN55022, EN55024, FCC PART 15 Class B	
Radiated Interference	EN55022, EN55024, FCC PART 15 Class B	



Harmaonic Current	EN61000-3-2 Class D	
Conducted Disturbance	EN61000-4-6 Level 3	
Radiation Harassment	EN61000-4-3 Level 3 Class B	
Power Frequency	EN61000-4-8 Level 3	
Harassment		
Static Harassment	EN61000-4-2 Level 4 Class B	
fast Burst	EN61000-4-4 Level 4 Class B	
Lightning Strike (Surge)	EN61000-4-5 Level 4 Class B	
interrupted Fall	EN61000-4-11	
Others		
Dimension	135*121*40mm	
Warranty	5 years	

## **DIMENSION**

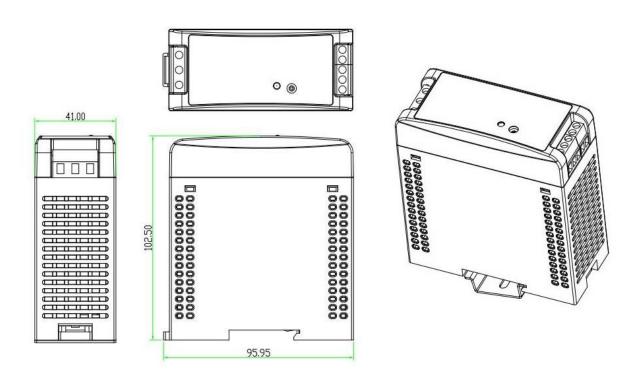



## **CONTACT US**

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: HZGWS-PoE

Email: hzgws@hzgws.com

Skype: hzgws@hzgws.com

Website: www.hzgws.com

Address: Building 3, Phase II, Xinghe Artificial Intelligence Industrial Park, No.333 Zhongkai 6th

Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

