

## Product Datasheet

# 16-port 10/100M Fast Ethernet Switch

(GWS-H1016)



## OVERVIEW

The GWS-H1016 is a high performance and easy-to-maintain high speed forwarding unmanaged fast Ethernet switch. It is suitable for hotels, banks, campuses, factory dormitories, and small and medium-sized enterprises.

The GWS-H1016 has 16\*10/100M adaptive RJ45 ports. The bidirectional transmission rate is up to 200Mbps, which realizes the convenient connection and expansion of the network. Each port support full line-speed forwarding. 4M large-capacity cache to ensure timely transmission of large files and stable video streaming. 7\*24 hours of stability, and no disconnection effectively solving problems such as video freezes and picture loss in high-definition surveillance environments. The switch adopts an all-steel shell. Simple, stylish, and durable. It support desktop, wall-mounted, and 1U rack-mounted. Plug and play, no configuration, simple and convenient to use.

## FEATURE

### ■ 10/100M access, full line-speed forwarding

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support 10/100M adaptive RJ45 port, plug and play, to meet the networking needs of various scenarios.

### ■ Stable and reliable, easy to operate


- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, no fan, metal shell.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link.
- ◇ Adopt high stability power supply, high redundancy design to provide long-term stable power output.

## TECHNICAL SPECIFICATION


Model	GWS-H1016	GWS-H1024
<b>Interface Characteristics</b>		
Fixed Port	16*10/100Base-TX RJ45 ports (Data)	24*10/100Base-TX RJ45 ports (Data)
Ethernet Port	10/100Base-TX auto-sensing, full/half duplex MDI/MDI-X self-adaption	
Twisted Pair	10BASE-T: Cat3,4,5 UTP(≤100 meters)	
Transmission	100BASE-TX: Cat5 or later UTP(≤100 meters)	
<b>Chip Parameter</b>		
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	

Switching Capacity	7.2Gbps (Non-blocking)	8.8Gbps (Non-blocking)
Forwarding Rate@64byte	2.38Mpps	3.57Mpps
MAC	16K	
Buffer Memory	4M	
Jumbo Frame	10K	
LED Indicator	Power: PWR (Green), Network: Link(Green)	
<b>Power Supply</b>		
Total PWR / Input Voltage	<10W/(AC100-240V)	<15W/(AC100-240V)
Power Consumption	Standby<7W, Full Load<10W	Standby<8W, Full Load<15W
Power Supply	Built-in power supply, AC100~240V 50-60Hz 0.56A	
<b>Physical Parameter</b>		
Operation TEMP/ Humidity	0~+55°C, 5%~90% RH Non condensing	
Storage TEMP/ Humidity	-40~+75°C, 5%~95% RH Non condensing	
Dimension (L*W*H)	270*181*44.5mm	
Net /Gross Weight	<1.25kg /<1.6kg	
Installation	Desktop, Wall-mounted, 1U/19 inch	
<b>Certification &amp; Warranty</b>		
Lightning Protection	Lightning protection: 4KV 8/20us; Protection level: IP30	
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS	
Warranty	1 year, lifelong maintenance.	

## DIMENSION

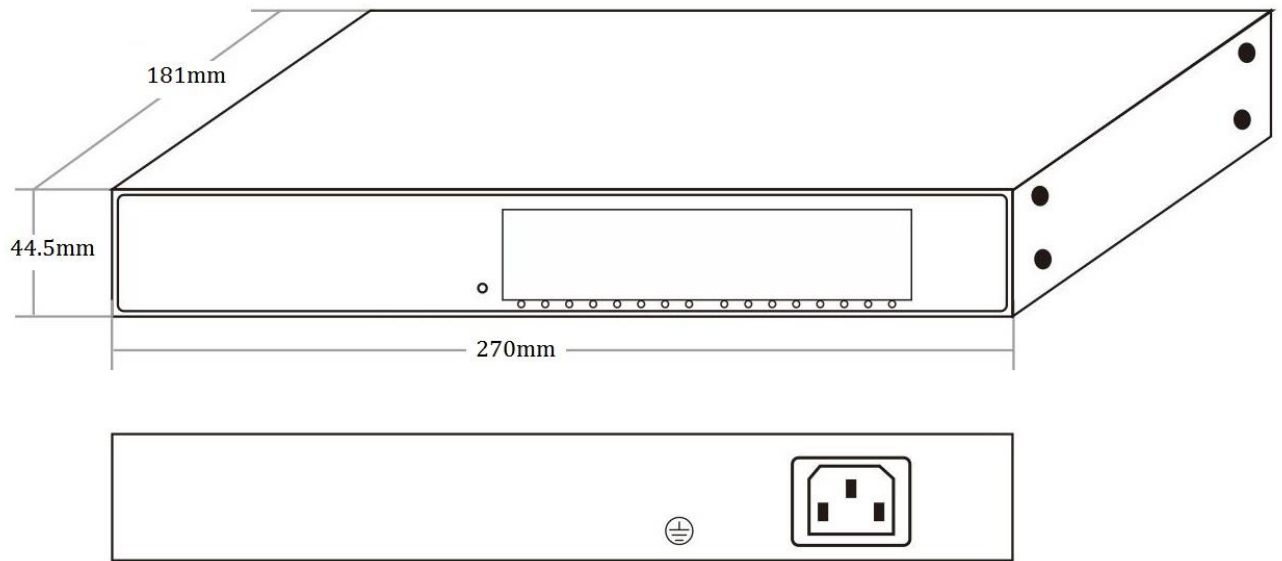

## APPLICATION

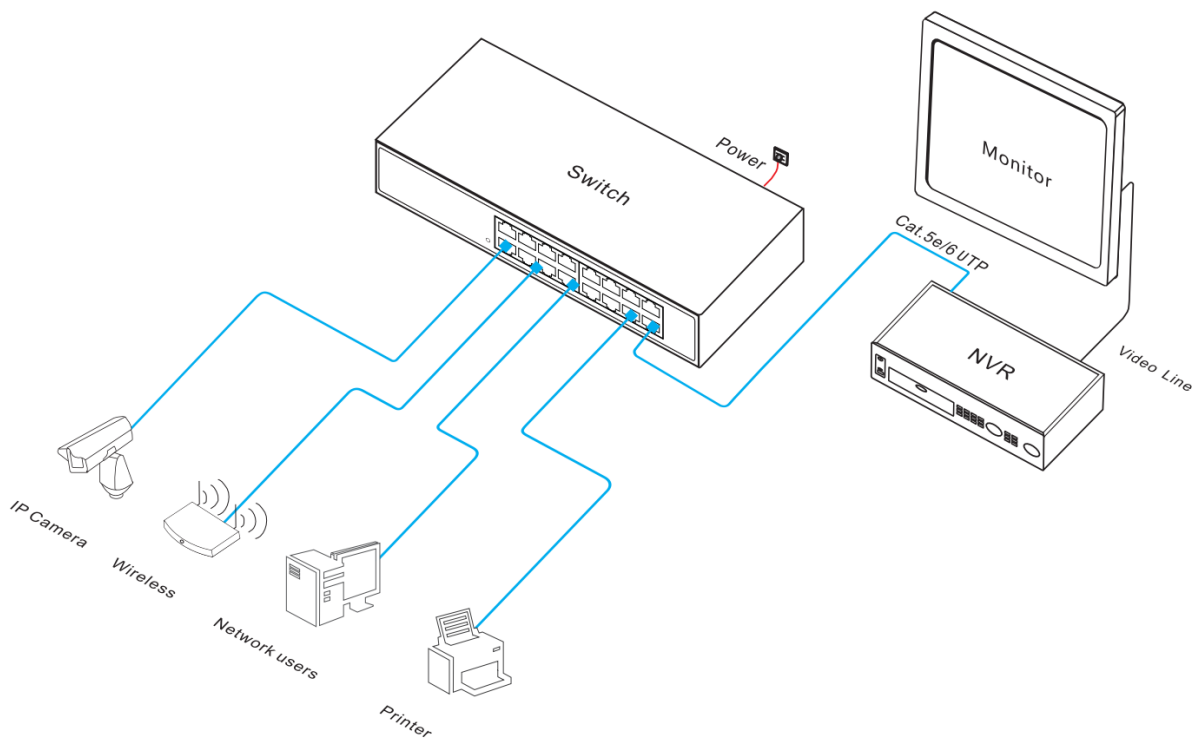

## ORDERING INFORMATION

Model	Description	Configure Power Supply
GWS-H1016	Unmanaged fast Ethernet switch with 16*10/100M RJ45 ports. Built-in power supply. Support 1U/19 inch rack installation.	20W
GWS-H1024	Unmanaged fast Ethernet switch with 24*10/100M RJ45 ports. Built-in power supply. Support 1U/19 inch rack installation.	

## PACKING LIST

	Content	Qty	Unit
Packing List	16-port 10/100M Fast Ethernet Switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## RELATED PRODUCT

Model	Description
GWS-H1005S	Mini unmanaged Ethernet switch with 5*10/100M RJ45 ports. External power supply.
GWS-H1008S	Mini unmanaged Ethernet switch with 8*10/100M RJ45 ports. External power supply.
GWS-H3005S	Mini unmanaged Ethernet switch with 5*10/100/1000M RJ45 ports. External power supply.

GWS-H3008S	Mini unmanaged Ethernet switch with 8*10/100/1000M RJ45 ports. External power supply.
GWS-H3016	Unmanaged Ethernet switch with 16*10/100/1000M RJ45 ports. Built-in power supply. Support 1U/19 inch rack installation.
GWS-H3024	Unmanaged Ethernet switch with 24*10/100/1000M RJ45 ports. Built-in power supply. Support 1U/19 inch rack installation.

## CONTACT US



Tel: 0086-752-3397806

WeChat: HZGWS--PoE

Email: [h zgws@h zgws.com](mailto:h zgws@h zgws.com)

Skype: [h zgws@h zgws.com](https://www.skype.com/people/hzgws@h zgws.com)

Website: [www.hzgws.com](http://www.hzgws.com)



Address: Building 3, Phase II, Xinghe Artificial Intelligence Industrial Park, No.333 Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou