

Product Datasheet

14-port Gigabit Managed Industrial Ethernet Switch

(GWS-IPS33148FM)



OVERVIEW

The GWS-IPS33148FM is a Gigabit managed industrial Ethernet fiber switch independently developed by GWS. It has 10*10/100/1000Base-T adaptive RJ45 ports and 4*100/1000Base-X uplink SFP fiber ports. Each port can support wire-speed forwarding.

The GWS-IPS33148FM has L2+ network management functions, supports IPV4/IPV6 management, static routing forwarding, complete security protection mechanism, perfect ACL/QoS strategy, and rich VLAN functions for easy management and maintenance. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS (<20ms) to improve link backup and network reliability. When a unidirectional network fails, communication can be quickly restored to ensure uninterrupted communication of important

applications. Port management, routing address management, port flow control, VLAN division, IGMP, security policy, and other application business configurations can be performed through Web, CLI, SNMP, Telnet, and other network management methods according to application needs. It is excellent adaptability to industrial field environments (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). It is suitable for industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to form an economical, efficient, stable, and reliable communication network.

FEATURE

■ Gigabit access, uplink SFP fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and SFP fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Strong business processing capability

- ◇ Support ERPS ring network and STP/RSTP/MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based, and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

■ Security

- ◇ Support port isolation and port broadcast storm suppression.
- ◇ Support IP+MAC+port+VLAN quadruple flexible combination binding function.
- ◇ Support 802.1X authentication to provide authentication functions for LAN computers, and control the authorization status of controlled ports according to the authentication results.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, L/A, and SYS.
- ◇ Low power consumption, no fan, Aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

■ Easy O&M management

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ HTTPS, SSLV3, SSHV1/V2, and other encryption methods are more secure in management.
- ◇ RMON, system log, and port traffic statistics are convenient for network optimization and transformation.
- ◇ LLDP is convenient for the network management system to query and judge the communication status of the link.
- ◇ Support diverse management and maintenance methods such as Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), Telnet, etc.

TECHNICAL SPECIFICATION

Model	GWS-IPS33148FM
-------	----------------

Interface Characteristics	
Fixed Port	Power-off alarm switch (FAULT) 1*RS232 Console port (115200,N,8,1) 10*10/100/1000Base-T RJ45 ports (Data) 4*100/1000Base-X uplink SFP fiber ports (Data) 2 sets V+, V- redundant DC power port (6P Phoenix terminal)
Ethernet Port	Port 1-10 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤ 100 meters) 100BASE-TX: Cat5 or later UTP (≤ 100 meters) 1000BASE-T: Cat5e or later UTP (≤ 100 meters)
Optical Fiber Port	Gigabit optical fiber interface, default matching optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Fiber Port Expansion	Support Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	52Gbps (non-blocking)
Forwarding Rate @64byte	20.83Mpps
CPU(Hz)	416M
DRAM	1G
FLASH	128M


MAC	8K
Buffer Memory	6M
Jumbo Frame	9.6K
LED Indicator	Power: PWR (Green), System: SYS (Green), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
Power Supply	
Power Consumption	Standby<10W, Full load<15W
Working Voltage	DC12-48V, 6P industrial Phoenix terminal, support anti-reverse protection.
Power Supply	No, optional 24V/24W industrial power supply
Physical Parameter	
Operation Temp/ Humidity	-40~+80°C, 5%~90% RH Non condensing
Storage Temp/ Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	165*148*54mm
Net /Gross Weight	1.1kg/ 1.3kg
Installation	Desktop, 35mm DIN Rail
Certification & Warranty	
Lightning Protection	Protection level: IP40 Lightning protection: 6KV 8/20us IEC61000-4-3 (RS):10V/m (80~1000MHz) FCC Part 15/CISPR22 (EN55022): Class B IEC61000-6-2 (Common Industrial Standard) IEC61000-4-9 (Pulsed magnet field): 1000A/m IEC61000-4-10 (Damped oscillation): 30A/m 1MHz IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV IEC61000-4-4 (EFT): Power cable: ±4kV, data cable: ±2kV

	<p>IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s</p> <p>IEC61000-4-2 (ESD): $\pm 8\text{kV}$ contact discharge, $\pm 15\text{kV}$ air discharge</p> <p>IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz)</p> <p>IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s</p> <p>IEC61000-4-5 (Surge): Power cable: CM$\pm 4\text{kV}$/ DM$\pm 2\text{kV}$, data cable: $\pm 4\text{kV}$</p>
Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.
Network Management Feature	
Interface	<p>Port temperature protection settings</p> <p>IEEE 802.3x flow control (Full duplex)</p> <p>Broadcast storm suppression based on port rate</p> <p>Port EEE Green Ethernet energy-saving configuration</p> <p>Limit the speed of the message traffic at the inbound and outbound ports mini granularity is 64Kbps</p>
L3 Feature	<p>ARP protocol, max 1024 entries</p> <p>Static route/default route, max 128 entries</p> <p>L2+ network management function, IPV4/IPV6 dual-stack management</p> <p>L3 routing forwarding, communication between different network segments and different VLAN</p>
VLAN	<p>Port configuration of Access, Trunk, Hybrid.</p> <p>VLAN based on MAC, VLAN based on the protocol</p> <p>(4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration</p>
Port Aggregation	LACP, Static aggregation, Max 7 aggregation groups and max 8 ports per group
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring	G.8032 (ERPS), ring network recovery time less than 20ms, 255 Ring at


Network Protocol	most, Max 1024 devices per ring.
Multicast	MLD Snooping, Multicast VLAN, Fast log out, IGMP Snooping v1/v2/v3 and 1024 multicast groups at most
Port Mirroring	Bidirectional data mirroring based on port
QoS	Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Rate Limiting, Flow-based redirection Flow-based Packet Filtering, 8*Output queues of each port 802.1p/ DSCP priority mapping, Diff-Serv QoS, Priority Mark/ Remark
ACL	ACL distribution based on port and VLAN L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	Port-based IEEE802.1X authentication SSL guarantees data transmission security Quad binding function of IP+MAC+VLAN+ports Port isolation, ARP message speed limit function MAC address learning limit, MAC address black hole Anti DoS attack, Port broadcast message suppression Hierarchical user management and password protection SSH 2.0 provides a secure encrypted channel for user login Host data backup mechanism, ARP intrusion detection function IP source address protection, AAA & RADIUS & TACACS+ certification
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	Web network management (https) Link Layer Discovery Protocol(LLDP) Viewing CPU Instant Utilization Status NTP clock, One click restore, SNMP V1/V2/V3 Cable status check, Ping detection, System work log

	<p>GWS-NMS platform cluster management (LLDP+SNMP)</p> <p>Console/AUX Modem/Telnet/CLI command line configuration</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p>
System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable</p>

DIMENSION

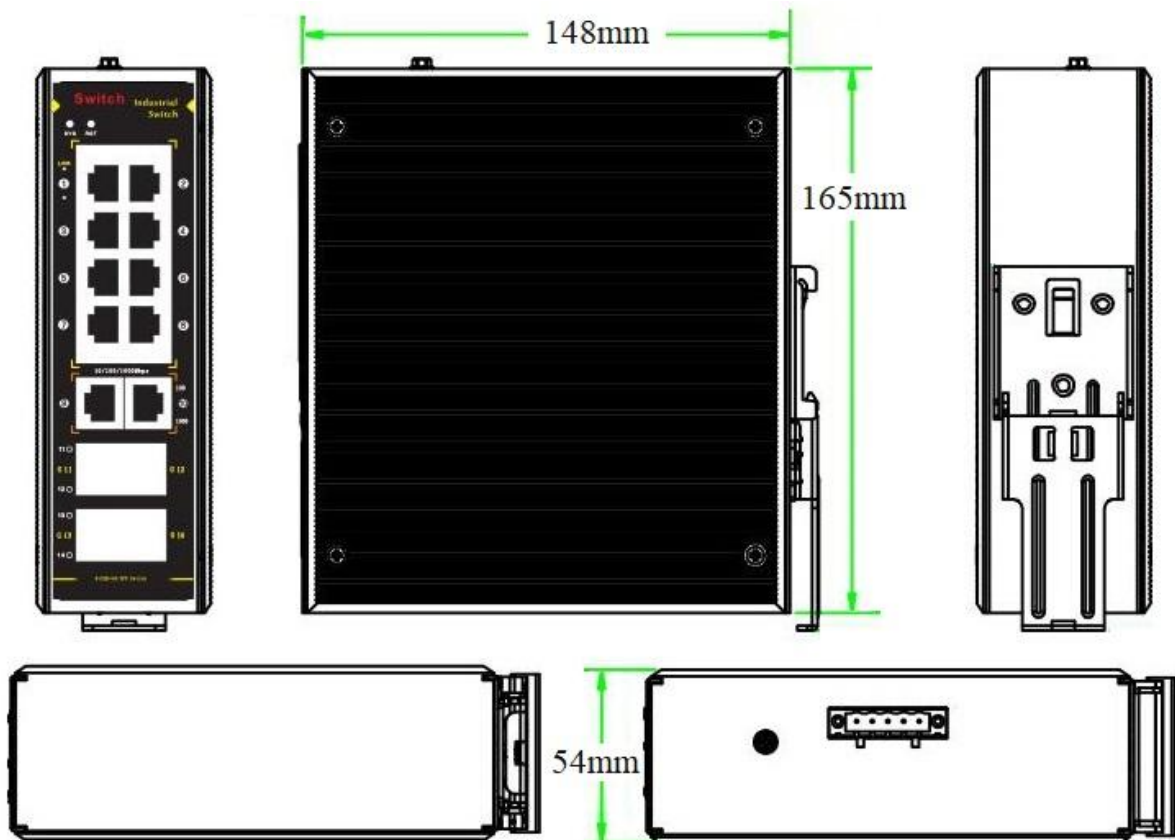

APPLICATION

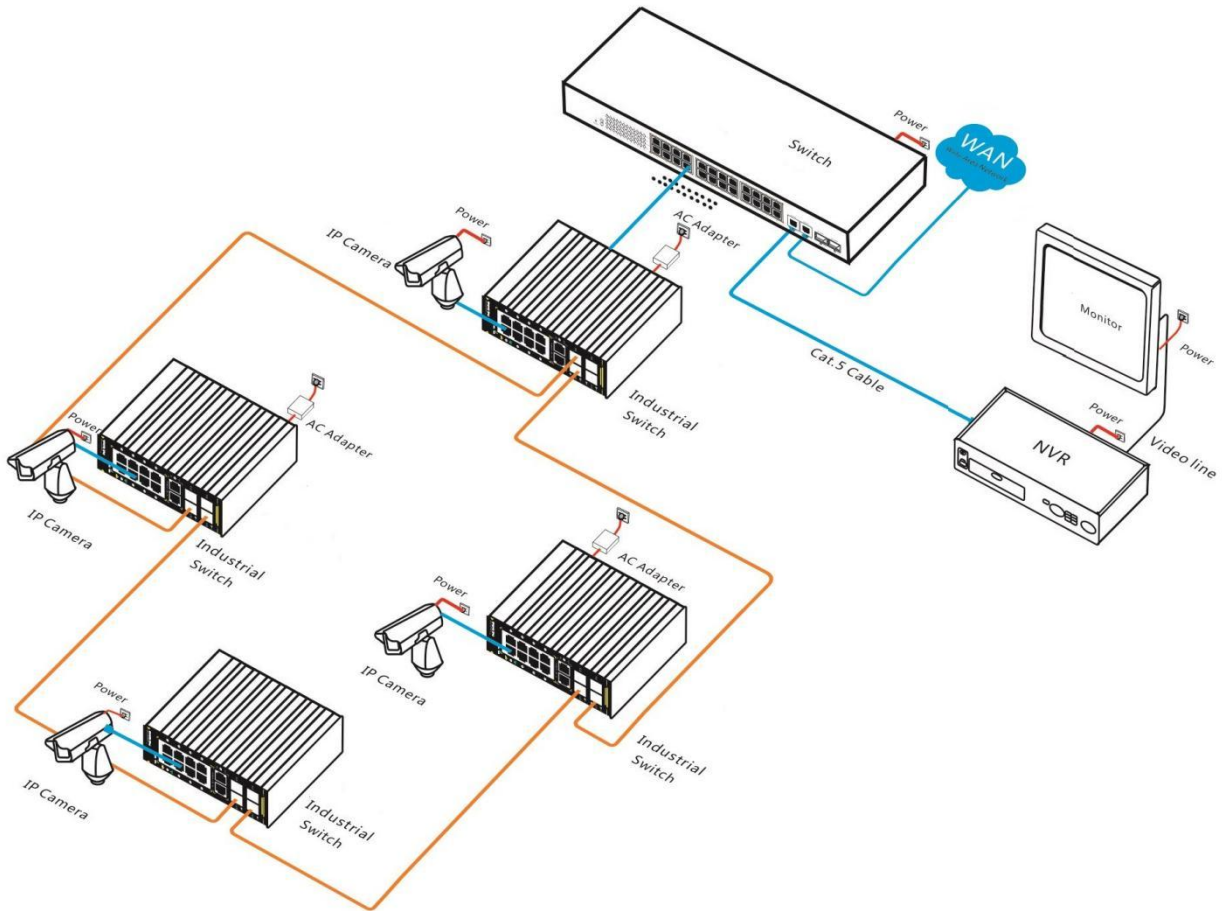

ORDERING INFORMATION

Model	Description	Recommended Power Supply
GWS-IPS33148FM	L2+ managed industrial Ethernet fiber switch with 10*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.	24W

Note: The optical module and power supply are not included and need to be purchased.

PACKING LIST

Packing List	Content	Qty	Unit
	14-port gigabit managed industrial Ethernet switch	1	SET
	RJ45-DB9 Adapter Cable	1	PC
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. support DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. support DDM function and hot plugging.	PC
	2612-T-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC
	2613-R-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. support DDM function and hot plugging.	PC

POWER SUPPLY

Product	Model	Description	Unit
24W DIN Rail Industrial Power Supply	GWS-DP24-24	DIN Rail 24W single set of output power supply Input Voltage: AC100V~240V 50-60H, 0.35A Output Voltage: DC24V, 1.0A Operation Temperature: -40°C to +70°C	PC

RELATED PRODUCT

Model	Description
GWS-IPS33064FM	L2+ managed industrial fiber switch with 4*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.
GWS-IPS33084FM	L2+ managed industrial Ethernet fiber switch with 4*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.
GWS-IPS33108FM	L2+ managed industrial fiber switch with 8*10/100/1000M RJ45 ports and 2*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.
GWS-IPS33168FM	L2+ managed industrial fiber switch with 8*10/100/1000M RJ45 ports and 8*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.
GWS-IPS33168FM-4GF	L2+ managed industrial fiber switch with 12*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. It can support dual DC power input and DIN Rail mounting.
GWS-IPS36168FM	L2+ managed industrial Ethernet fiber switch with 12*10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ fiber ports. It can support dual DC power input and DIN Rail mounting.

CONTACT US



Tel: 0086-752-3397806

WeChat: HZGWS--PoE

Email: hkgws@hkgws.com

Skype: [hkgws@hkgws.com](https://www.skype.com/people/hkgws@hkgws.com)

Website: www.hkgws.com



Address: Building 3, Phase II, Xinghe Artificial Intelligence Industrial Park, No.333 Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou